


## BUCKET ELEVATORS

*Up to 8,500 BPH*

### SPECIFICATIONS

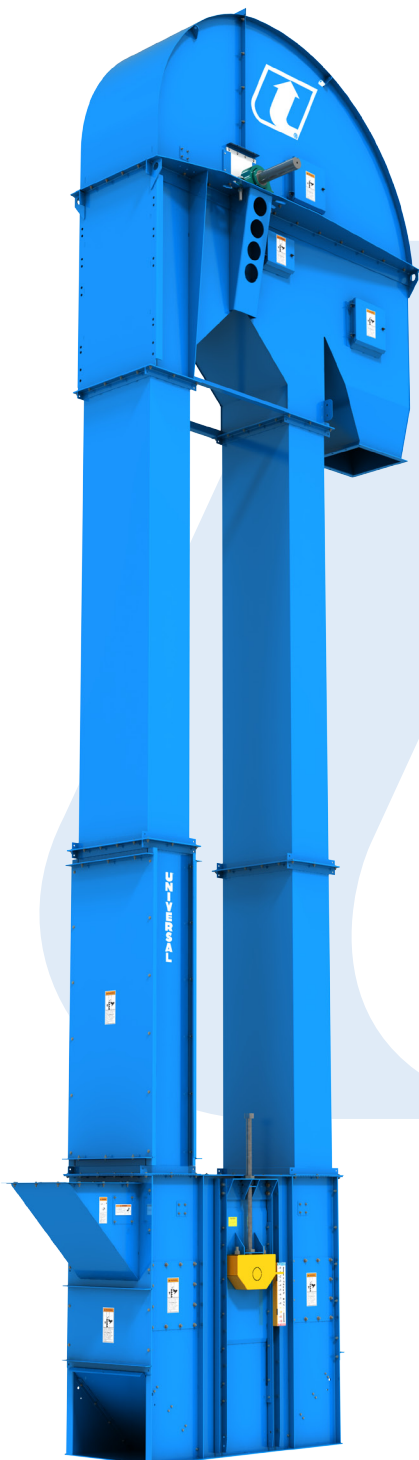

Model	UniMAX™ 30
Capacity - Free Flowing Material @ 110% Waterline Bucket Fill	5,000 - 8,500 BPH 6,222 - 10,577 ft³/h 176 - 299 m³/h
Short TPH @ 50lbs/ft³	152 - 259
MTPH @ 50lbs/ft³	138 - 235
Belt Speed FPM	510 - 801
Belt Speed m/s	2.59 - 4.07
Head Shaft RPM	62 - 102
Bucket Spacing	8" (203.2mm)
Head Casing	12 Ga. Hoods & 10 Ga. Lower Head
Head Shaft Bearings	Sealed Pillow Block Type E-Xtra Bearings Optional Pillow Block Type EXL Bearings
Head Pulley	30" (762mm) Dia. Pulley with Slide Lagging
Buckets	14" x 6" (355.6mm x 152.4mm) HDPE Buckets Standard
Belting	15" (381mm) Wide Rubber Conti-Tech Pathfinder®
Legging	12 Ga. Twin Leg Seam Welded Columns Optional 10 Ga.
Boot Casing	7 Ga. (4.55mm)
Boot Shaft Bearings	Sealed Pillow Block Ball Bearing
Boot Pulley	30" (762mm) Dia. Self-Cleaning Wing Pulley
Steel Construction	Powder Coated Carbon, Hot Dipped Galvanized, or Stainless
Drive Package	Optional
Motor	Optional
Lining Options	AR Steel, Ceramic, or Urethane
Optional Accessories	Shovel Pocket, Rack & Pinion Cleanout Slides, Cup Fill Inspection Door, Pressure Relief Panels




MADE IN THE U.S.A.

**THE TRADITION OF  
EXCELLENCE CONTINUES!**

[www.universalindustries.com](http://www.universalindustries.com)

# UniMAX™ 30

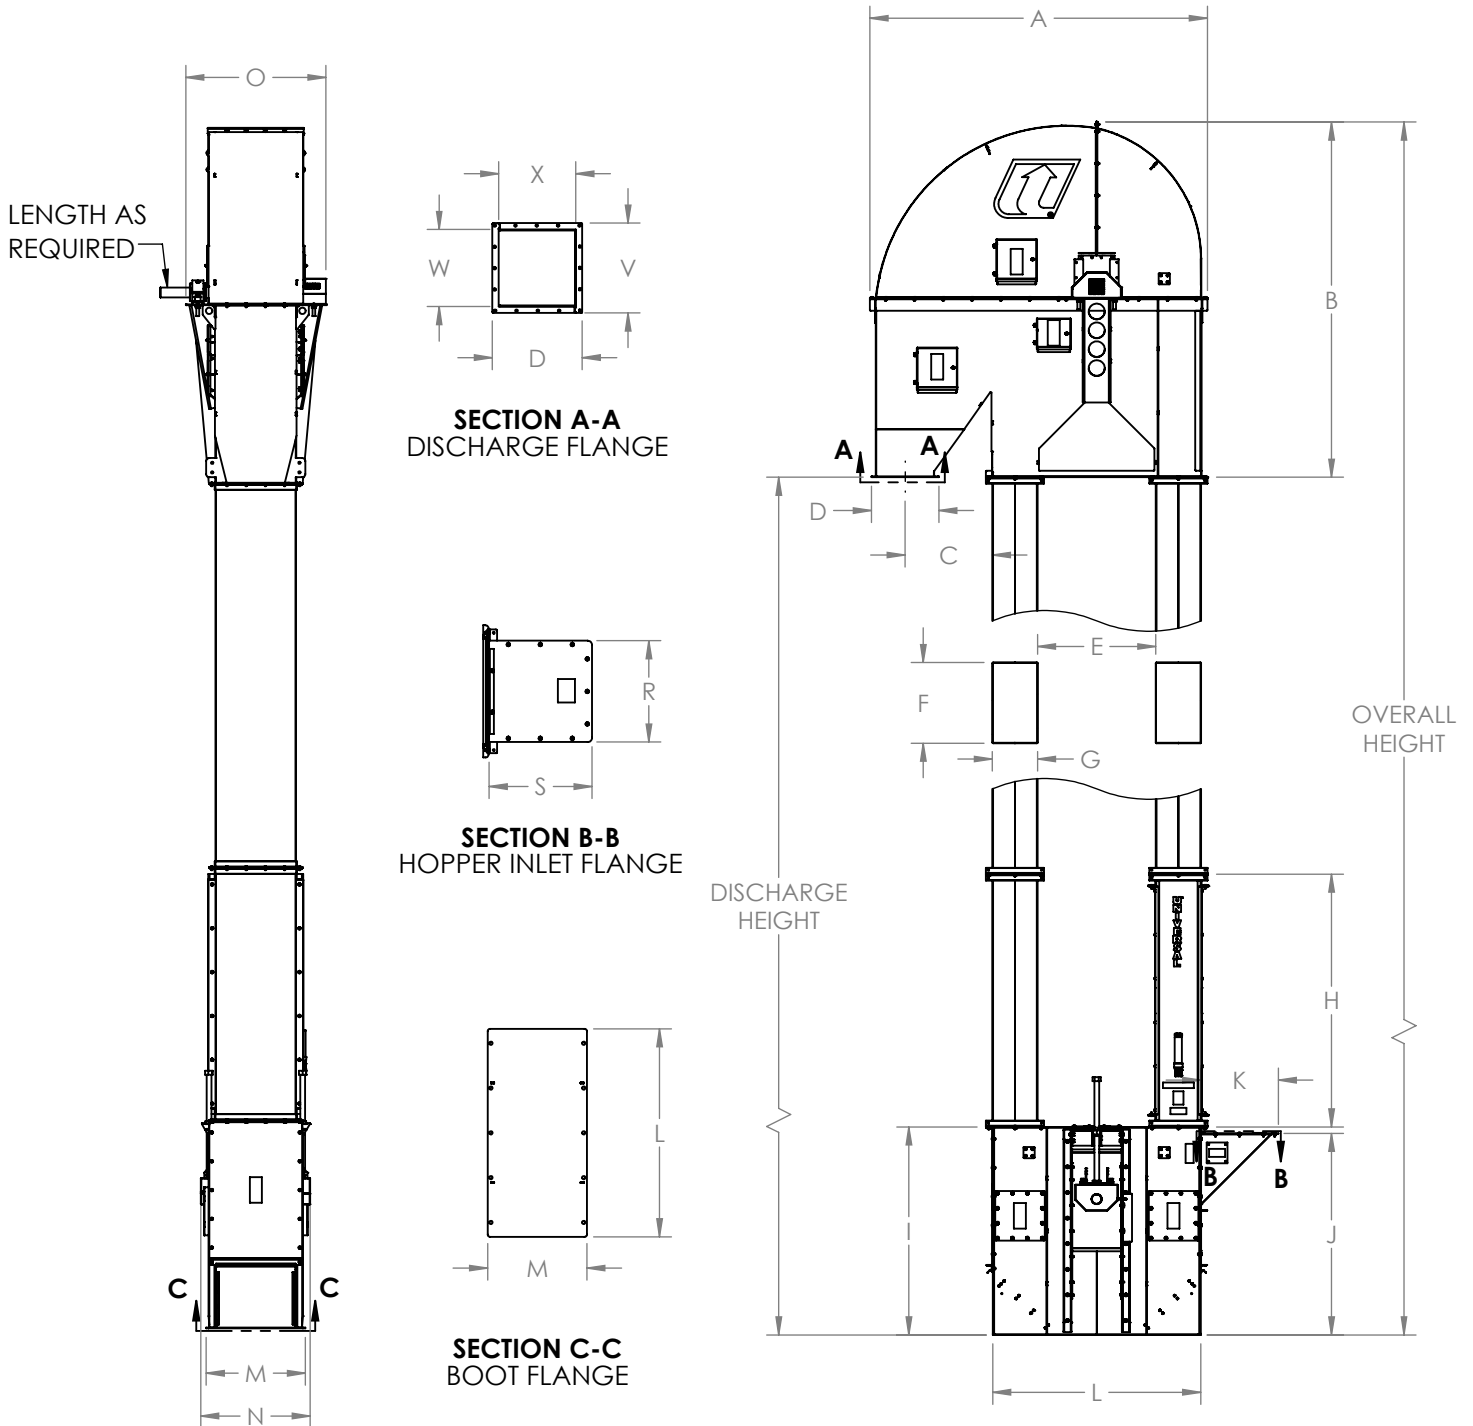

Unit	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	R	S	V	W	X
in	77.6	76	18	13.5	25.9	19	11.8	69.3	50.7	48.7	16	49.6	17.5	20.8	28	16	16	13.5	12	12
mm	1,971	1,930	457	343	658	482	301	1,759	1,289	1,238	406	1,260	445	527	711	406	406	343	305	305

NOTE: Unit application, location and specifications determine the type, quantity and/or placement of electrical, electrical safety or other safety controls required. Whether these controls are supplied by Universal Industries or another supplier, all OSHA safety and health standards, the National Electrical Code and local codes must be met and followed. Because we constantly strive to provide the finest material handling equipment, establishing industry standards, specifications must remain subject to change without notice.